


## SMD P16 Outdoor Details

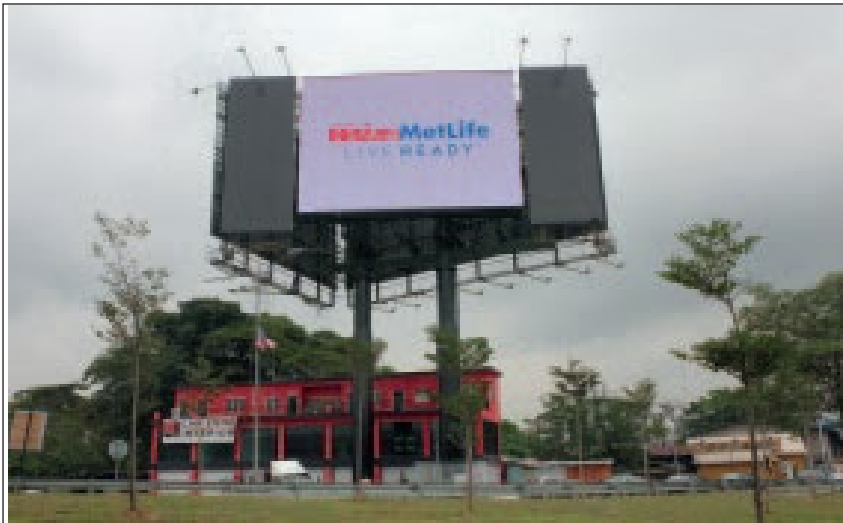

### **Product Features:**

Use highlight LED and High Quality Plastic Parts  
High Contrast Display can achieve a good effects.  
Light Weight current drive LED, low power consumption.  
Perfect Uniformity and consistency

### **Applications:**

City Squares, Pedestrianized Streets,  
Exhibition Centers, Stadiums,  
Road Traffic, Airports, Railway Stations,  
Docks, Etc.

## SMD P16 Outdoor Specification

SMD P16 Outdoor Specification	
Driving Method	Static Constant Current
Pixel Pitch	16.0mm
Resolution Of Module	20 x 10
Size Of Module	320mm x 160mm
Brightness	6500cd/m2
Density	3906dots/m2
Pixel Configuration	1R1G1B
Maximum Power Consumption	<558W/m2
Driving Device	Constant Current
Refresh Frequency	≥3840Hz
MTBF	> 10,000 Hours
IP Level	IP 65 (Front Side)



**P16 Front View**



**P16 Rear View**