

SMD P6 Outdoor Details



Product Features:

Use highlight LED and High Quality Plastic Parts

High Contrast Display can achieve a good effects.

Light Weight current drive LED, low power consumption.


Perfect Uniformity and consistency

Applications:

City Squares, Pedestrianized Streets, Exhibition Centers, Stadiums, Road Traffic, Airports, Railway Stations, Docks, Etc.

SMD P6 Outdoor Specification

SMD P6 Outdoor Specification	
Driving Method	1/18 Scan
Pixel Pitch	6.0mm
Resolution Of Module	32 x 32
Size Of Module	192mm x 192mm
Brightness	6000cd/m2
Density	10000dots/m2
Pixel Configuration	1R1G1B
Maximum Power Consumption	<792W/m2
Driving Device	Constant Current
Refresh Frequency	≥3840Hz
MTBF	> 10,000 Hours
IP Level	IP 65 (Front Side)

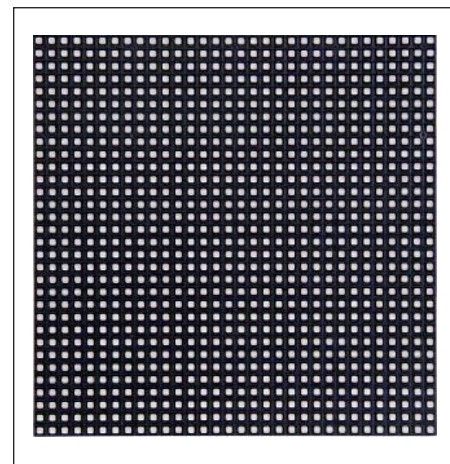

P6 Front View



P6 Rear View