

RECESSED DOWNLIGHT G5

AdvanLED



30K HOURS LIFE TIME
 or **50K HOURS** LIFE TIME
IP20 INGRESS PROTECTION
LM80 LED LM 80 **50K HRS**



PHILIPS
LED Driver

Suruhanjaya Tenaga
Energy Commission
LED Driver



Product Specification

Model Size	6 inch, 8 inch
Model No.	AvL-DL-x-yyW-P01-zK* G5
Lumen (lm)	1425, 1900
Efficiency (lm/W)	95
Power (W)	12, 15, 20
Colour Temperature, CCT (K)	3000K, 4000K, 6500K
Colour Index (CRI)	≥ 80
Beam Angle (°)	100°
Weight (Kg)	0.1, 0.15, 0.2
Dimmable	No

General Specification

Input Voltage (VAC)	220 - 250
Power Factor (PF)	≥ 0.9
THD (%)	≤ 20
IP Rating	IP 20
Materials	Aluminium & Polycarbonate
Driver	(A) Philips Certa LED Driver, P01 (B) Philips Xitanium LED Driver, P02 (C) Lifud LED Driver, L01
Life Time (hours)	(A) 30000 (B,C) 50000
Warranty (years)	(A) 2 (B,C) 3
Finishing Color	Matte White
Operating Temp. (°C)	(A) 0°C ~ 40°C (B,C) -20°C to 50°C
Working Humidity (% RH)	10 ~ 90
Storage Temp. (°C)	10°C - 65°C

Features

Applications



Home



Office



Retail



Corrido

Reference

KLIA, Kuala Lumpur Malaysia

KLIA, Kuala Lumpur Malaysia

Remark:

*x refers to inches : 6 inch, 8 inch

*yy refers to W : 20W, 30W, 50W (50W available for 8 Inch only)

*z refers to CCT: 3-3000K, 4-4000K, 65-6500K

AdvanLED



Malaysian Brand




MADE IN MALAYSIA

RECESSED DOWNLIGHT G5


INDOOR

Photometric Result :

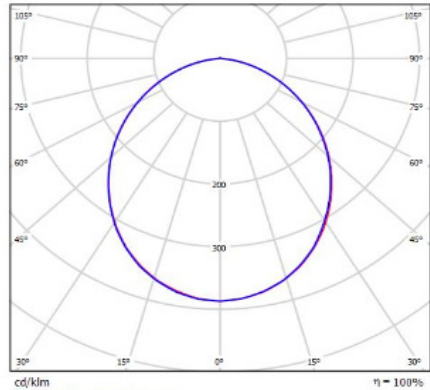



100

Dimension (mm):

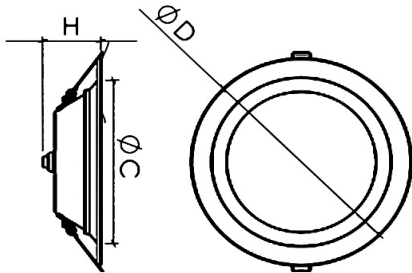

	6 Inch	8 Inch
Height (H)	46	48
Diameter (D)	180	215
Cut-out size	165	200

Installation Data / Driver Dimensions (mm)

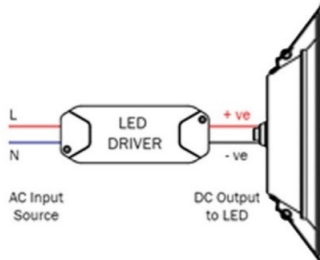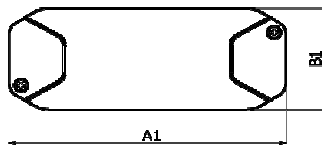

	12W / 15W / 20W *
A1	115
B1	45

*Dimensions for Philips LED Driver