


LED ECO TUBES

AdvanLED

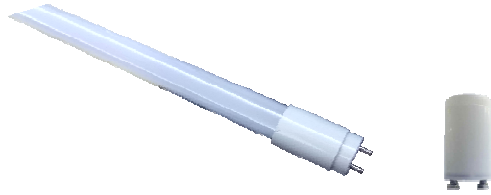

Product Specification

| | |
|-----------------------------|---------------------|
| Model Size | 2FT, 4FT |
| Model No. | AvL-T8-xFT-yK |
| Lumen (lm) | 1000, 2100 |
| Efficiency (lm/W) | 117, 125 |
| Power (W) | 8.5, 16.5 |
| Colour Temperature, CCT (K) | 3000K, 4000K, 6500K |
| Colour Index (CRI) | ≥ 80 |
| Beam Angle (°) | 140° |
| Weight (Kg) | 0.121, 0.242 |
| Dimmable | No |
| Base/ EndCap | GU13(T8) |

General Specification

| | |
|-------------------------|-----------------------|
| Input Voltage (VAC) | 220 - 250 |
| Power Factor (PF) | ≥ 0.9 |
| THD (%) | ≤ 20 |
| IP Rating | IP 20 |
| Materials | Glass & Polycarbonate |
| Driver | Within Endcap |
| Life Time (hours) | 30,000 |
| Warranty (years) | 2 |
| Finishing Color | Matte White |
| Operating Temp. (°C) | -20°C ~ 40°C |
| Working Humidity (% RH) | 10 ~ 90 |
| Storage Temp. (°C) | 10°C - 65°C |

Features

Applications



Home



Hypermarket



Shopping Mall

Reference

KLIA, Kuala Lumpur Malaysia

KLIA, Kuala Lumpur Malaysia

Remark:

*x refers to ft : 2FT, 4FT

*y refers to CCT : 3-3000K, 4-4000K, 65-6500K

AdvanLED

ISO 9001
BUREAU VERITAS
Certification



Malaysian Brand




MADE IN MALAYSIA

LED ECO TUBES


INDOOR

Photometric Result :

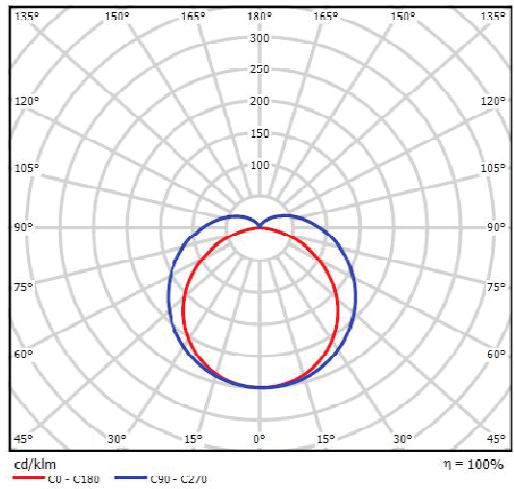


140°

Dimension (mm):

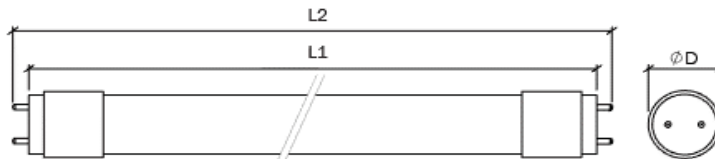

| | 2FT | 4FT |
|--------------|-----|------|
| Length (L1) | 588 | 1198 |
| Length (L2) | 602 | 1213 |
| Diameter (D) | 28 | 28 |

Installation Data / Driver Dimensions (mm)

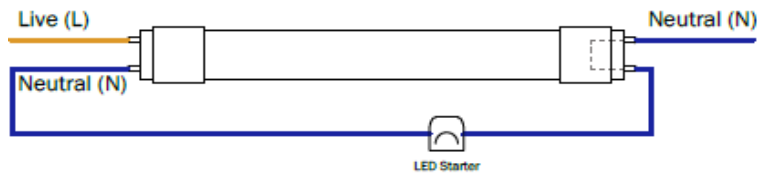

- *Standard connection for LED Eco Tube
- *1 side of the EndCap Pins are shorted
- *LED Starter Fuse Required
- *Electrical supply should be turned off before any installation is done