

RECESSED SPOTLIGHT

AdvanLED



30K HOURS



IP50



LM80 50K HRS



Product Specification

Model Size	1x1, 1x2, 1x3
Model No.	AvL-SQDL-4-x-yyW-ADJ-zK*
Lumen (lm)	1275, 2550, 3825
Efficiency (lm/W)	85
Power (W)	15, 30, 45
Colour Temperature, CCT (K)	3000K, 4000K, 6500K
Colour Index (CRI)	≥ 80
Beam Angle (°)	40°, 60°
Weight (Kg)	0.276, 0.602, 0.943
Dimmable	No

General Specification

Input Voltage (VAC)	220 - 250
Power Factor (PF)	≥ 0.9
THD (%)	≤ 20
IP Rating	IP 50
Materials	Aluminium & Polycarbonate
Driver	External LED Driver
Life Time (hours)	30,000
Warranty (years)	2
Finishing Color	Matte White
Operating Temp. (°C)	0°C ~ 45°C
Working Humidity (% RH)	10 ~ 90
Storage Temp. (°C)	10°C - 65°C

Features

Applications



Home



Corrido

Reference

KLIA, Kuala Lumpur Malaysia

KLIA, Kuala Lumpur Malaysia

Remark:

Application: Indoor Application | Showroom | Hotel Corridor

*x refers to no. of array : 1, 2, 3

*y refers to W : 15W, 30W, 45W

*z refers to CCT : 3000K/ 4000K/ 6500K

*Black Casing Available

*1 Driver = 1 Light Fitting

1 x 1 = 1 Driver

2 x 2 = 2 Driver

3 x 3 = 3 Driver

AdvanLED

ISO 9001
BUREAU VERITAS
Certification



Malaysian Brand




MADE IN MALAYSIA


RECESSED SPOTLIGHT

INDOOR

Photometric Result :

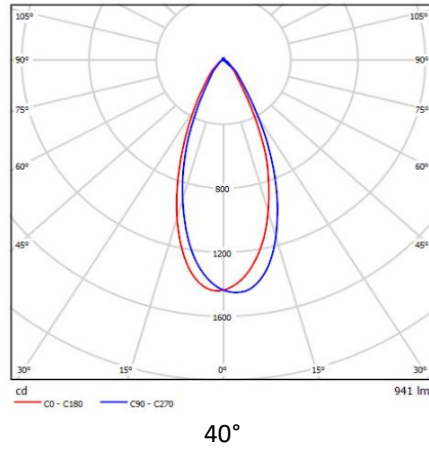

Dimension (mm):

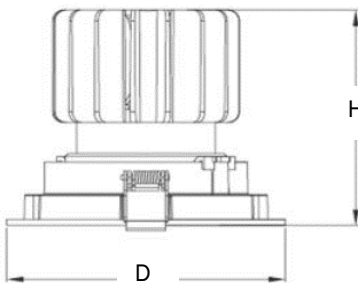

	1 x 1	1 x 2	1 x 3
Height (H)	83	83	83
Diameter (D)	100	200	300
Cut-out size	90 x 90	190 x 90	290 x 90

Installation Data / Driver Dimensions (mm)

