


LED STREET LIGHT G4

AdvanLED

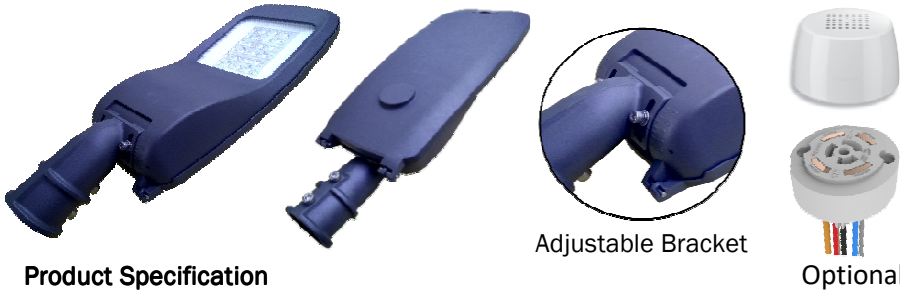

JMAL Approved

PHILIPS
LED DRIVER

Product Specification

Part No.	: AvL-SL-xxx-G4-4K
Power (W)	: 75, 200
Lumen (lm)	: 9000, 26000
Efficiency (lm/W)	: 120 ~ 130
Colour Temperature, CCT (K)	: 4000K
Colour Rendering Index (CRI)	: ≥ 70
Beam Angle (°)	: Asymmetrical Type II
Dimmable	: Yes



LUMINAIRE SAFETY



LUMINAIRE PERFORMANCE



EMC COMPLIANCES



SURGE PROTECTION DEVICE

General Specification

Input Voltage (V _{AC})	: 220 - 250
Power Factor (PF)	: ≥ 0.9
THD (%)	: ≤ 20
IP Rating	: IP 66
Materials	: Die-cast Aluminium
Driver	: External LED Driver (Within Casing)
Life Time (hours)	: 50,000
Finishing Color	: Dark Grey
Operating Temp. (°C)	: -20°C ~ 50°C
Working Humidity (% RH)	: 10 ~ 90
Storage Temp. (°C)	: 10°C - 65°C

Remark:

Application: Outdoor Application | Street Lighting | Compound Lighting | Walkway Lighting

*Smart Solution sold separately

*x refers to W : 75W - 075, 200W - 200



Malaysian Brand




MADE IN MALAYSIA

AdvanLED


LED STREET LIGHT G4

AdvanLED

Photometric Result : Typical Data Type II

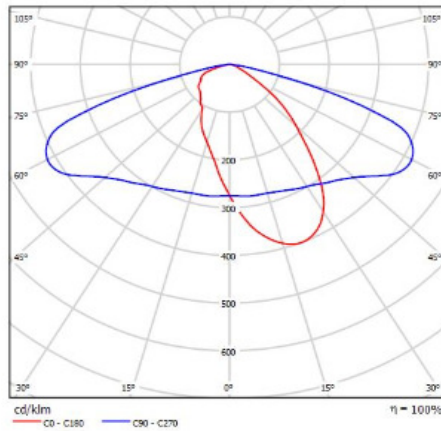


Dimension (mm) :

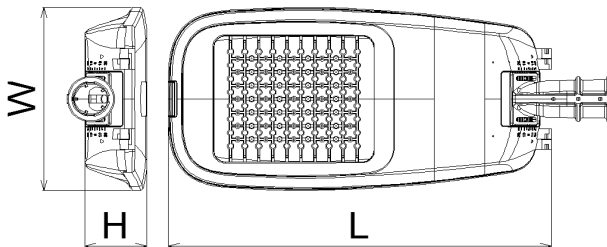

	75W	200W
Length (L)	669	804
Width (W)	250	357
Height (H)	145	145
Weight (KG)	5	8


Features :

Standard Spigot Dimensions:

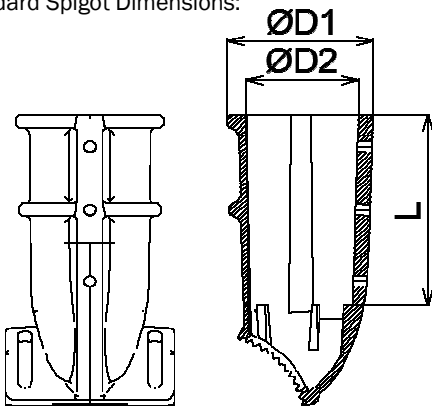

L	120
□D2	68
□D1	87
Screws	2 x M10
Depth	≥ 100

Spigot Adapter Demension

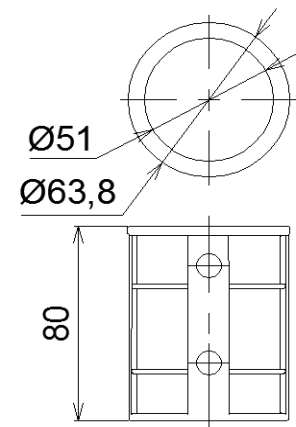

*Optional for Nema 7 Socket and Cap

*Smart Sensor Ready using standard ANSI C136.41 Nema 7 socket

*Kindly contact sales representative for more details



AdvanLED