

LED HIGH MAST LIGHT FITTING

AdvanLED



**SPD 20KA
PROTECTION**

SURGE PROTECTION DEVICE

*No Hood Provided

Product Specification

Part No.	: AVL-HM-CM-300M-ASYMD-XK
Power (W)	: 300
Lumen (lm)	: 45000
Efficiency (lm/W)	: 150
Colour Temperature, CCT (K)	: 2700-6500K
Colour Rendering Index (CRI)	: >70
Beam Angle (°)	: Asymmetric
Dimmable	: No

General Specification

Input Voltage(V _{AC})	: 220 - 250
Power Factor (PF)	: ≥ 0.9
THD (%)	: ≤ 20
IP Rating	: IP 66
Materials	: Aluminium and UV Treated PC Lens
Driver	: External LED Driver
Life Time (hours)	: 50,000
Finishing Color	: Black
Operating Temp. (°C)	: -20°C ~ 50°C
Working Humidity (% RH)	: 10 ~ 90
Storage Temp. (°C)	: 10°C - 65°C

Remark:

Outdoor Application




AdvanLED



LED HIGH MAST LIGHT FITTING

AdvanLED

Photometric Result : Typical Data

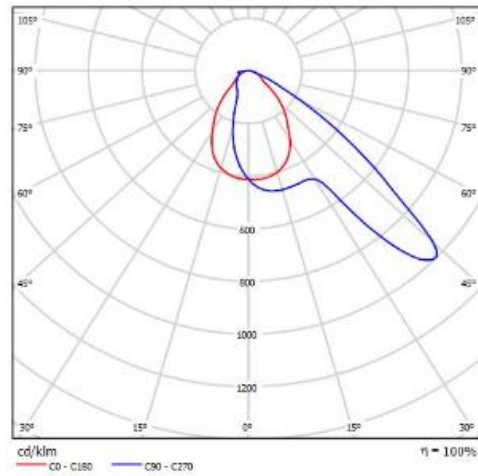

Dimension (mm)

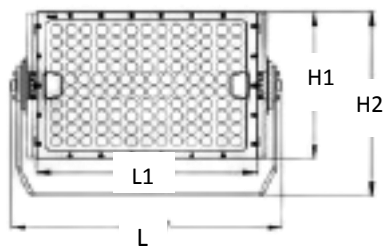

Length (L)	343.7
Length (L1)	280
Width (W)	237.7
Height (H1)	190
Height (H2)	184
Height (H)	237.6
Weight (Kg)	6



AdvanLED