



2025 ORBIT TUBE G2


9W | 18W



Excellent Energy
Efficiency



Wide Light
Distribution

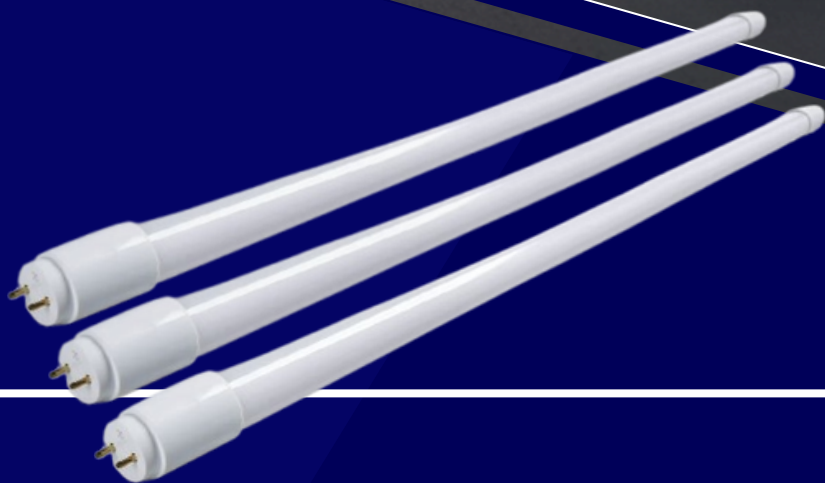

LED VISION SDN BHD

AdvanLED


ORBIT TUBE G2

APPLICATIONS

- ✓ Shopping Malls
- ✓ Retail outlets
- ✓ Car Parks
- ✓ Factories

FEATURES AND BENEFITS

- ✓ Energy efficiency performance
- ✓ Rated for 30,000 hours, significantly reducing replacement frequency and maintenance costs.
- ✓ Cost-effective operation
- ✓ Durable and safe design



CCT Options Available
3000K | 4000K | 6500K



High Quality
Construction with high-quality materials



Consistent and Stable performance

The external LED driver minimizes heat and improves efficiency, ensuring consistent brightness over the tube's lifetime



Wide Light Distribution
260°

**Durable
Reliable
Efficient**

All in 1 Powerful Package



ORBIT TUBE G2

PRODUCT SPECIFICATION


Light Technical		Mechanical and Housing	
Luminous Efficacy (lm/W)	116 lm/W	Materials	Glass & PC End Cap
Colour Rendering Index (CRI)	80	Driver	Built-in
Operating Technical		Life Time (hours)	30,000
Input Voltage	220-250	Finishing Color	White
Power Factor (PF)	0.9	Operating Temp (°C)	-20°C - 50°C
Control and Dimming		Working Humidity (%RH)	10 ~ 90
Beam Angle (°)	260°	Storage Temp (°C)	10°C-65°C
Dimmable	No		
Approval and Application			
IP Rating	IP20		

ORDER DESCRIPTION


Product Code	Product Description	Power (W)	Luminance (lm)	CCT
LOT802FT009W830G2140GF0000	Orbit Tube 2FT 9W 830 260D G2	9	1,050	3000K
LOT802FT009W840G2140GF0000	Orbit Tube 2FT 9W 840 260D G2	9	1,050	4000K
LOT802FT009W865G2140GF0000	Orbit Tube 2FT 9W 865 260D G2	9	1,050	6500K
LOT804FT018W830G2140GF0000	Orbit Tube 4FT 18W 830 260D G2	18	2,100	3000K
LOT804FT018W840G2140GF0000	Orbit Tube 4FT 18W 840 260D G2	18	2,100	4000K
LOT804FT018W865G2140GF0000	Orbit Tube 4FT 18W 865 260D G2	18	2,100	6500K

ORBIT TUBE G2

LIGHT DISTRIBUTION

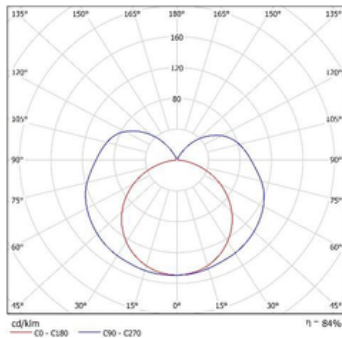


DIMENSION

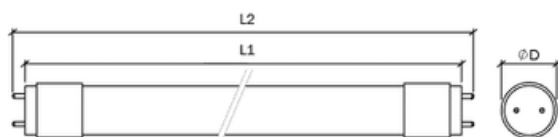

	2FT	4FT
Length (L1)	588	1198
Length (L2)	602	1213
Diameter(D)	28	28
Weight (kg)	0.121	0.242

INSTALLATION

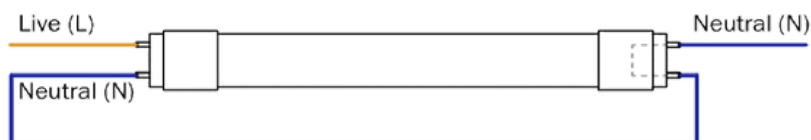

 **30K HOURS**
LIFE TIME

 **LM80**
LED LM 80 **30K HRS**

 **IP20**
INGRESS PROTECTION

CERTIFIED
ISO 9001


Malaysia Brand


BUATAN MALAYSIA

AdvanLED

© 2025 LED Vision Sdn Bhd All Right Reserved. All photometric and electrical data provided have a tolerance of $\pm 10\%$. Characteristics and specifications are subject to change without prior notice. Electrical installations and connections should only be performed by a qualified professional. The application images are for illustrative purposes and may not depict the actual LED Vision product. The information in this publication is typical and should not be considered a guarantee of individual product performance.